

pic technology

PIC TECHNOLOGY LLP - (NEOI-SINGAPORE – eMXI) (香港 股份有限公司)

Vodafone Australia WAP / GPRS / MMS Settings for NEOI Phones with NeoITchat and <http://mobile.msn.com> Service

Settings:

GPRS 1:

Profile name: -VFAU PXT
GPRS APN: - live.vodafone.com
Username: - {blank}
Password: - {blank}
Auth. Type : Normal
Back
Save
Yes
Done


GPRS 2:

Profile Name: VF Live! Aus
APN: live.vodafone.com
User Name: {blank}
Password: {blank}
Auth. Type : Normal
Back
Save
Yes
Done

WAP 1:

WAP profile name: VFAU PXT
WAP gateway IP: (request from Vodafone Live)
(Profile) Homepage title:
Homepage URL: <http://mobile.msn.com>
Security/authentication: OFF/ normal
APN (for WAP access): VFAU PXT
User-id:
Password:
BACK
(1) Activate Profile
OK
YES

NeoITchat: Your Neoi Phones have a built in special Chat Client, "Instan-t Mobile" which works over the internal Neoi Network (without any Advertising or other disturbing Information from public Service providers),

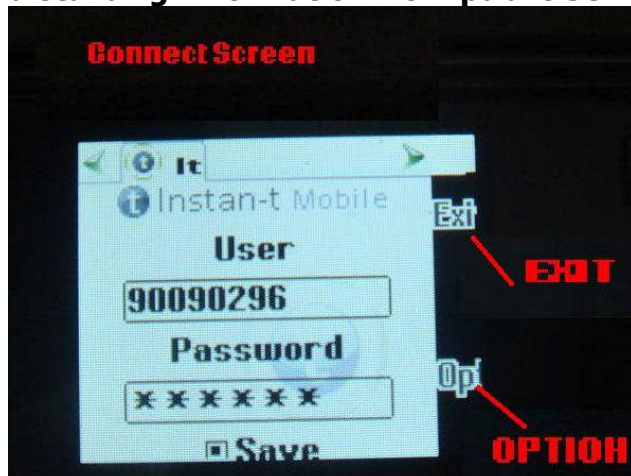

however the NeoITchat service works completely compatible with public networks like MSN, Yahoo etc. To connect to the NeoITchat, please push the DOWN Arrow on the 5 Way Navigator Pad on the Neoi Phones and select "IT" enter (Middle Key), then receive the NeoITchat log in screen (follow separate Instructions)

Neoi has assigned to You a NeoITchat account and a linking MSN Chat account which you may use freely.

However, some local Service Providers like SingTel, are blocking the advertising free **NeoITchat** service, but You still can access the Chat service thru the Neoi Wap Browser go to **MENUE >>> Services >>> OK >>> (2) Wap >>> OK >>> (4) Enter Address >>> OK** and enter <http://mobile.msn.com> , then log in with Your Neoi assigned MSN address or Your normal MSN / hotmail address !

MMS SETTINGS for NEOI 809 and 906

Vodafone live Australia MMS Settings for NEOI 809 – 906:

Profile Name: VFAU PXT MMS
Homepage: http://
Data Account: VFAU PXT
Connection Type: WAP
IP Number : (request from Vodafone Live)
Port: (request from Vodafone Live)
Username: (request from Vodafone live)
Password: (request from Vodafone Live)

SETTINGS Process:

Go to SMS >>>(6) Message Settings>>>OK>>>(5) Server Profile >>>OK >>> Select an empty Profile >>>OK>>>(2) Edit Profile>>>OK >>>(1) Rename Profile>>>EDIT> IDEAS MMS > OPTION(1) Done >>> OK >>>(2) Homepage > Edit <http://mms.singtel.com:10021/mmsc> >>> OPTION (1) Done >>> OK >>>(3) Data Account > select from GPRS: e-ideas (note: You must have created that GPRS Profile earlier) Option >>> Done >>> OK >>>(4)Connection Type > Select HTTP >>> OK >>> Press enter to edit the HTTP Profile >>>(1) Proxy Address 165.021.042.084 >>> Proxy Port > 8080 >>>Back >>> (5) Username >>> Edit > 65IDEAS > Option(1) Done >>> OK >>> (6) Password >>> Edit > IDEAS > Option >>>(1) Done>>> OK >>>BACK>>>(1) Activate Profile >>> OK >>> YES

Other INTERNET OVER GPRS SETTINGS NOT required for NEOI Phones

6. VIDEO STREAMING SETTINGS

A. **For WAP enabled phones:** The setting may under streaming or client configuration Connection Setting and Proxy: Disable

Access Point: e-ideas

B. For PDAs or PDA phones:

Connection Setting and Proxy: Disable

Access Point: internet

Please go to <http://www.neoi.de> or <http://www.neoi.com.sg> for the latest Software Downloads and applications for Your free NEOI Mobile Chat Services, Free Music File Converter to play Your favorite Music in NEOI format, and much more

Under Downloads You also find all Instructions and Manuals, please look at the NEOI 809i files and Manuals.

Thank You.

For any support please contact support@neoi.com.sg and via NeoITchat directly neoisupport or support@neoi.com.sg

14 Robinson Road, #13-00, Far East Finance Bldg. - SINGAPORE 048545

Phone: +65-649 49172, Fax: +65-312 57136 , eMail: emxi@emxi.com, <http://www.neoi.com.sg> , <http://www.neoi.de>

Main Operations Office: [Chang An, China](#) (Design Office - Manufacturing)