



# NEOi 908 Quick Reference

## A. Before Using Your Device


1. Remove the back cover

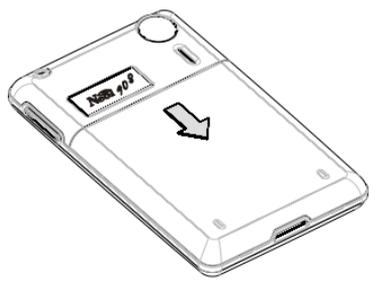


2. Install the battery

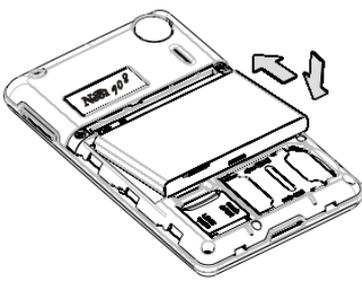

3. Insert the MicroSD card

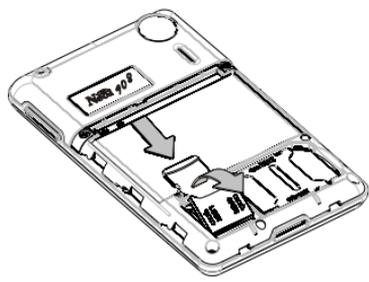

4. Insert the SIM card

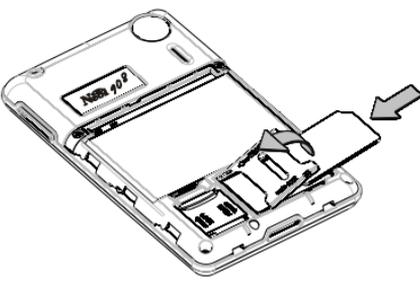

Note: When you insert or remove the Micro SD or SIM card, Please re-boot your device.

## 5. Charging the battery

Once you buy the phone the battery will not be fully charged for security reasons, so please charge the battery first. In order to charge, insert the battery into the phone and connect the USB charger cable either into the AC Card Charger or into a USB connection on your PC / Laptop. Insert the other end of the cable into your phone's USB socket as shown in the picture. ( Note: Please make sure to insert the plug in the correct position, Do not force the connector into the socket!) It will take a minimum of 3 hours to fully charge the battery, for first time charging we recommend charging 24 hours, which will extend the life of your battery. If the battery was not charged for an extended time or the battery was fully discharged, it may take several minutes before the charging re-starts and the charger icon appears.

## 6. Device power ON/OFF


Press and hold the power on/off button for about 3 seconds to power on your device.

## B. Pen Calibration, for first time usage it is recommended to follow below instructions for touch screen pen calibration:

Menu>Settings>pen calibration and click "OK" for process it.

## C. Making a call

1. Press the send key to open the call logs.
2. Touch the phone icon  on the screen, to input the number. To dial press the (green) send key.



## D. Shortcut

- Move the joystick UP in standby mode, device will be taken straight to the "Audio Player"
- Move the joystick DOWN in standby mode, device will be taken straight to the "Instant Message & Neo iMail"
- Move the joystick LEFT key in standby mode, device will be taken straight to the "Shortcuts"
- Move the joystick RIGHT key in standby mode, device will be taken straight to the "Camera"

## E. Personalize Your 908 (Menu>settings>User Profiles)

The device provides several modes: Standard Mode, Meeting Mode, Outdoor Mode, Indoor Mode, and Hands free Mode. When you connect the earphone, the device will turn to Hands free Mode automatically. Select one that you would like to change. After selecting the desired Profile, you will be asked to either "Activate" or "Customize". Select the "Customize" option. Once you select Customize, you will be given a menu where you can either chose to edit the ring tone by choosing "Tone Setup" or you can go to "Volume" to adjust the volume of the ring tone.

## F. Secure Your 908 (Menu>settings>security setup)

### 1. To enable SIM Lock

Enabling the SIM lock requires to enter a PIN code first before you use this features. You can enable the SIM lock by tapping menu>settings>security setup>SIM lock and selecting require PIN when phone is used.

### 2. To enable Phone Lock

Enabling the Phone Lock requires to enter a password to unlock the device after it has been left idle for a set period of time. If this function is enabled, you must enter the phone code upon each start-up. Note: The original phone Lock password is 0000.

### 3. To enable key lock

Enabling key lock helps prevent accidental key presses when the device is in your pocket or bag. Set the auto keypad lock of your device, press confirm to enter the setting screen. Select None (to invalidate keypad lock function), 5sec, 30sec, 60sec, or 5min to lock the keypad when no operation is made on the device within the specified time. Press the send key and touch the screen icon  immediately for unlock.

## G. Use another application and options while on a call.

During a call, you will see two options on the screen. Hands-Free-----This option will place the call on Hands Free. Options-----By clicking this, you will be able to view the various different options that you have while being on a call.

## H. Add your own ringtone.

Menu > Settings > User Profiles and select the profile that you want to edit. Then select it and chose the "Customize" option. Then select "Tone Setup" option. Select the item you want to edit. You will see a list of ring tones already pre loaded on your phone. To add a new tone, simply scroll down to "Empty ". Press "Ok" and then select "Replace". Then follow the options to find the location of the file you wish to use. And press "OK". The file is now added to your list. You can now select it and chose to make it your ringtone.

## I. Change your Wallpaper.

Go to Menu > Settings > Phone Setup > Display Characteristics.

## J. Default Security code and password is "0000".

## K. How to dial a "+" ?

Press the \* on the screen twice for "+" international calling.


## L. How do I divert calls?

Select Menu > Settings > Call Settings > Call Diverting, calls will be diverted to the specified number.

## M. Checking Missed Calls and other Call Logs

Select Call History from the Menu

## Neo i 908

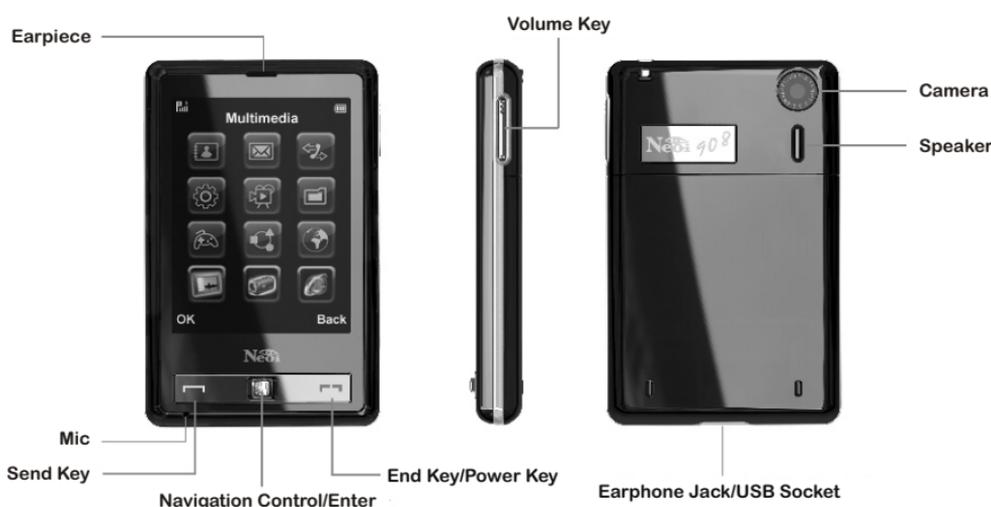

Please visit our shop at [www.neoi.de](http://www.neoi.de) or [www.fonfashion.com](http://www.fonfashion.com) for more Great Neo i Fon Fashion